


Code #	Push Force (N)	Pull Force (N)	Installation Height (mm)	Stroke Length (mm)	Speed (mm/s)
KX01MA0_363200	1500	1500	363	200	13
KX01MA0_370200	1500	1500	370	200	13
KX01MA0_600200	1500	1500	600	200	13
KX01MC0_600400	1500	1500	600	400	13
KX01MC0_438200	3000	3000	438	200	8
KX01MC0_460300	3000	3000	460	300	8
KX01MA0_468250	5000	5000	468	250	6
KX01MA0_582366	5000	5000	582	366	6

0 : Without Electronic Control (input:24 V DC)
B : With Electronic Control inside (input:220 V AC)

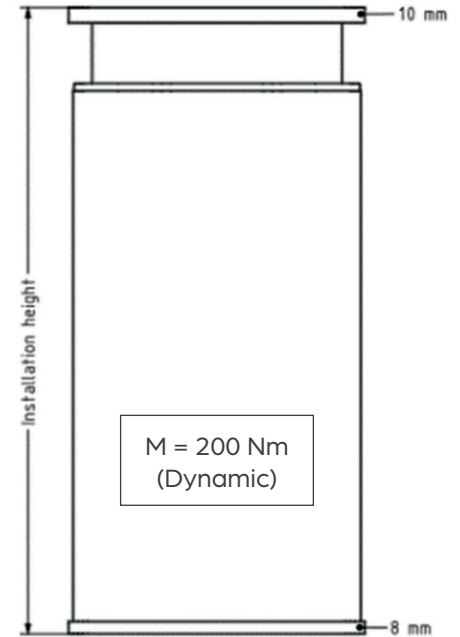

- Integrated Motor
- Tested to EN60601-1
- Presents special stroke and installation lengths according to your customized requirements
- Duty Cycle : 15 %

For the version "Electronic Control Inside" ;

- SOFT START Process
- Wide range input (100-240 V 50/60Hz)
- Safety relay driving
- Energy efficient
- Overcurrent protection
- Limb pinch prevention

