

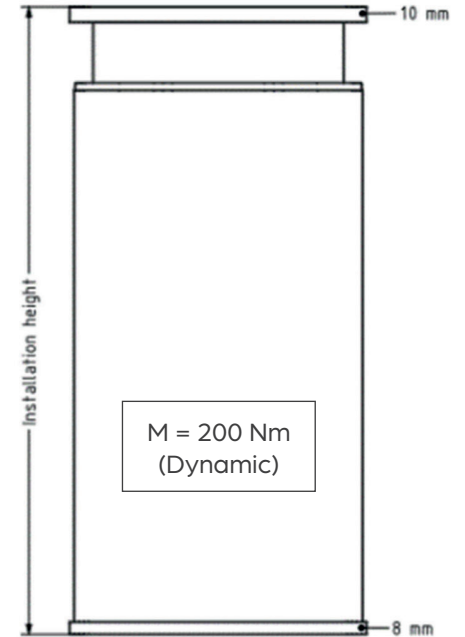
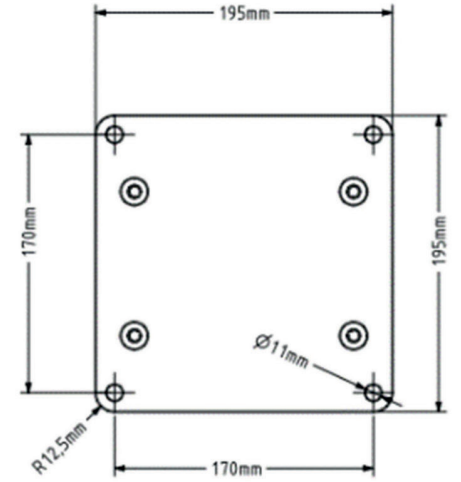


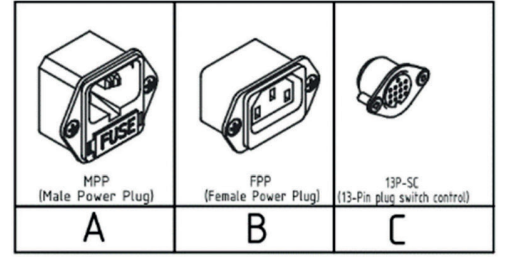

Master Column

Slave Column

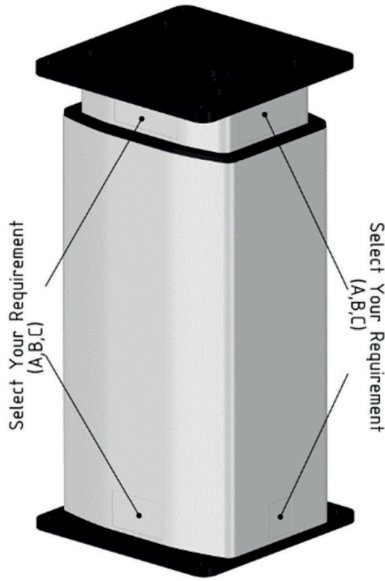

Code #	Push Force (N)	Pull Force (N)	Installation Height (mm)	Stroke Length (mm)	Speed (mm/s)
KX01MASB470250	1000	1000	470	250	17
KX01MASB495250	1000	1000	495	250	17

- Synchronization movement of Two Columns
- Integrated Motors with Hall Effect
- Tested to EN60601-1
- Presents special stroke and installation lengths according to your customized requirements
- Duty Cycle : 15 %

#### For the version "Electronic Control Inside" ;

- SOFT START Process
- Wide range input (100-240 V 50/60Hz)
- Safety relay driving
- Energy efficient
- Overcurrent protection
- Limb pinch prevention

